


Elevation Zone Volumes

Zone 198.00 to 248.00
 Cut volume : 359,198.7 C.F., 13,303.66 C.Y.
 Fill volume: 484,371.1 C.F., 17,939.67 C.Y.
 Running total:
 Cut volume : 359,198.7 C.F., 13,303.66 C.Y.
 Fill volume: 484,371.1 C.F., 17,939.67 C.Y.
 Net import = 4636 cy

Fill volume reduced by the following amounts
 Full foundations buildings 1-12 & 23-28 1168 sf x 6.5 deep x 18 = 5061 cy

Reduce fill by 5061 cy - 4636 cy = 425 cy excess (ZERO NET IMPORT)

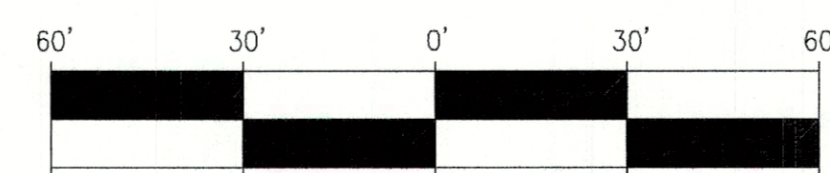

SCALE: 1" = 30'

NO.	DATE	REVISION
1.	8/22/23	PER LOCAL REQUIREMENTS
2.	11/13/23	PER PEER REVIEW

A COMPREHENSIVE PERMIT M.G.L.c. 40B
 THE RESIDENCES AT
 DARWIN COMMON
 28 UNITS
 CUT / FILL
 PLAN OF LAND
 IN
 WALPOLE, MA
 SCALE: 1"=30' AUGUST 13, 2021

GLOSSA ENGINEERING, INC.
 46 EAST ST
 EAST WALPOLE, MA 02032
 (508) 668-4401